

## Programming and Using System Speed Dials On The SBX-IP 320

### Programming System Speed Dials (Attendant Only)

ENTER SPEED BIN NO(2000) PAUSE      FLASH      D-TONE	Press the [TRANS/PGM] button, then press the [SPEED] button.
ENTER CO-BTN/DIGIT(2000) PAUSE      FLASH      D-TONE	Dial the Speed Bin Number (2000-2499)
1234567 SPEED 2000 PAUSE      FLASH      D-TONE	Dial the phone number to be stored, then press the [HOLD/SAVE] button to save.
JOHN ENTER NAME (SPEED 2000) PAUSE      FLASH      D-TONE	Enter a name (refer to "Entering Characters" on page 1-59), then press the [HOLD/SAVE] button to save.

### Using System Speed Dials

**Note:** Speed Dial Numbers are also known as Speed Bins, and may be designated as follows:

- System Speed Bins: 2000 to 2499

From an idle phone:

1. Press **SPEED**.
2. Enter the speed dial number (in the format as shown above).

**OR**

Press \* to dial the last speed dial number used.

**OR**

Press the SPEED soft button to search available speed dial numbers (both system and station) by name.

SPD\_NO LAST(\*) SAVE(#)  
 DIAL\_BY\_NAME([SPEED])  
 SPEED




*(continued on next page)*

**To Dial by Speed Name**

Once you have pressed the *SPEED* soft button as shown above:

3. Use ▼ ▲ on the Nav Button to scroll between DIAL BY STA SPD NAME or DIAL BY SYS SPD NAME option.
4. Press the OK soft button to select the "DIAL BY..." option you want to use.

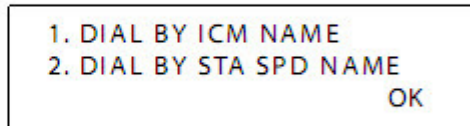

1. DIAL BY ICM NAME  
2. DIAL BY STA SPD NAME  
OK



If you have any questions please feel free to call us @ 303-688-6191